



Antique Stained Glass

SPECIFICATIONS

Name Surface Art Antique Stained Glass

Colors 7: Alabaster, Arabesque, Carrara, Calacatta, Coral, Paradise, Peppercorn

Material Glass

Installation Wall Only, Interior

Installation Guide lines All local building codes must be followed as well as all ANSI and TCNA guidelines (A137.2 and EJ171)

Surface Must be sound, stable, and free from any chance of deflection. Additional blocking may be required.

Setting Material High performing thinset that meets or exceeds ANSI A118.4 requirements with high polymer content. Bond Strength > 400 PSI. Latex Modified thinset is sufficient.

Grout Type A118.4 Grout must be unsanded or glass aggregate. Check packaging for opacity and water exposure guidelines. Lightly wet the surface of the glass prior to grouting to avoid grout haze.

Movement Joints Must be placed at maximum of 8ft in all directions IAW TCNA EJ171. Flexible joint bond to be used IAW ASTM C920.

COLORS



Carrara 1x1, Stack, Random Strip




Calacatta 1x1, Stack, Random Strip




Alabaster 1x1, Stack, Random Strip




Peppercorn 1x1, Stack, Random Strip

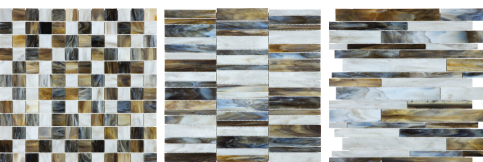

Coral 1x1, Stack, Random Strip

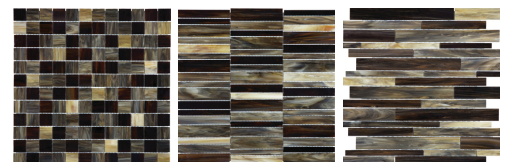

Paradise 1x1, Stack, Random Strip

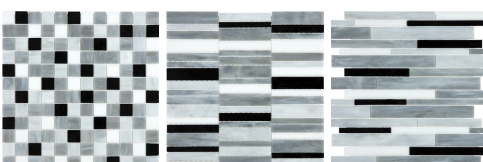

Arabesque 1x1, Stack, Random Strip